

COLLECTIONS 2024




COAST ROAD.....	04
DIRECTION.....	22
GROUND.....	36
LAKE STONE.....	52
ORIGINI.....	70
STONETRACK.....	82

COAST ROAD



COAST **LIGHT**
60x120 RT . 24"x48"

COAST **LIGHT**
60x120 RT . 24"x48"

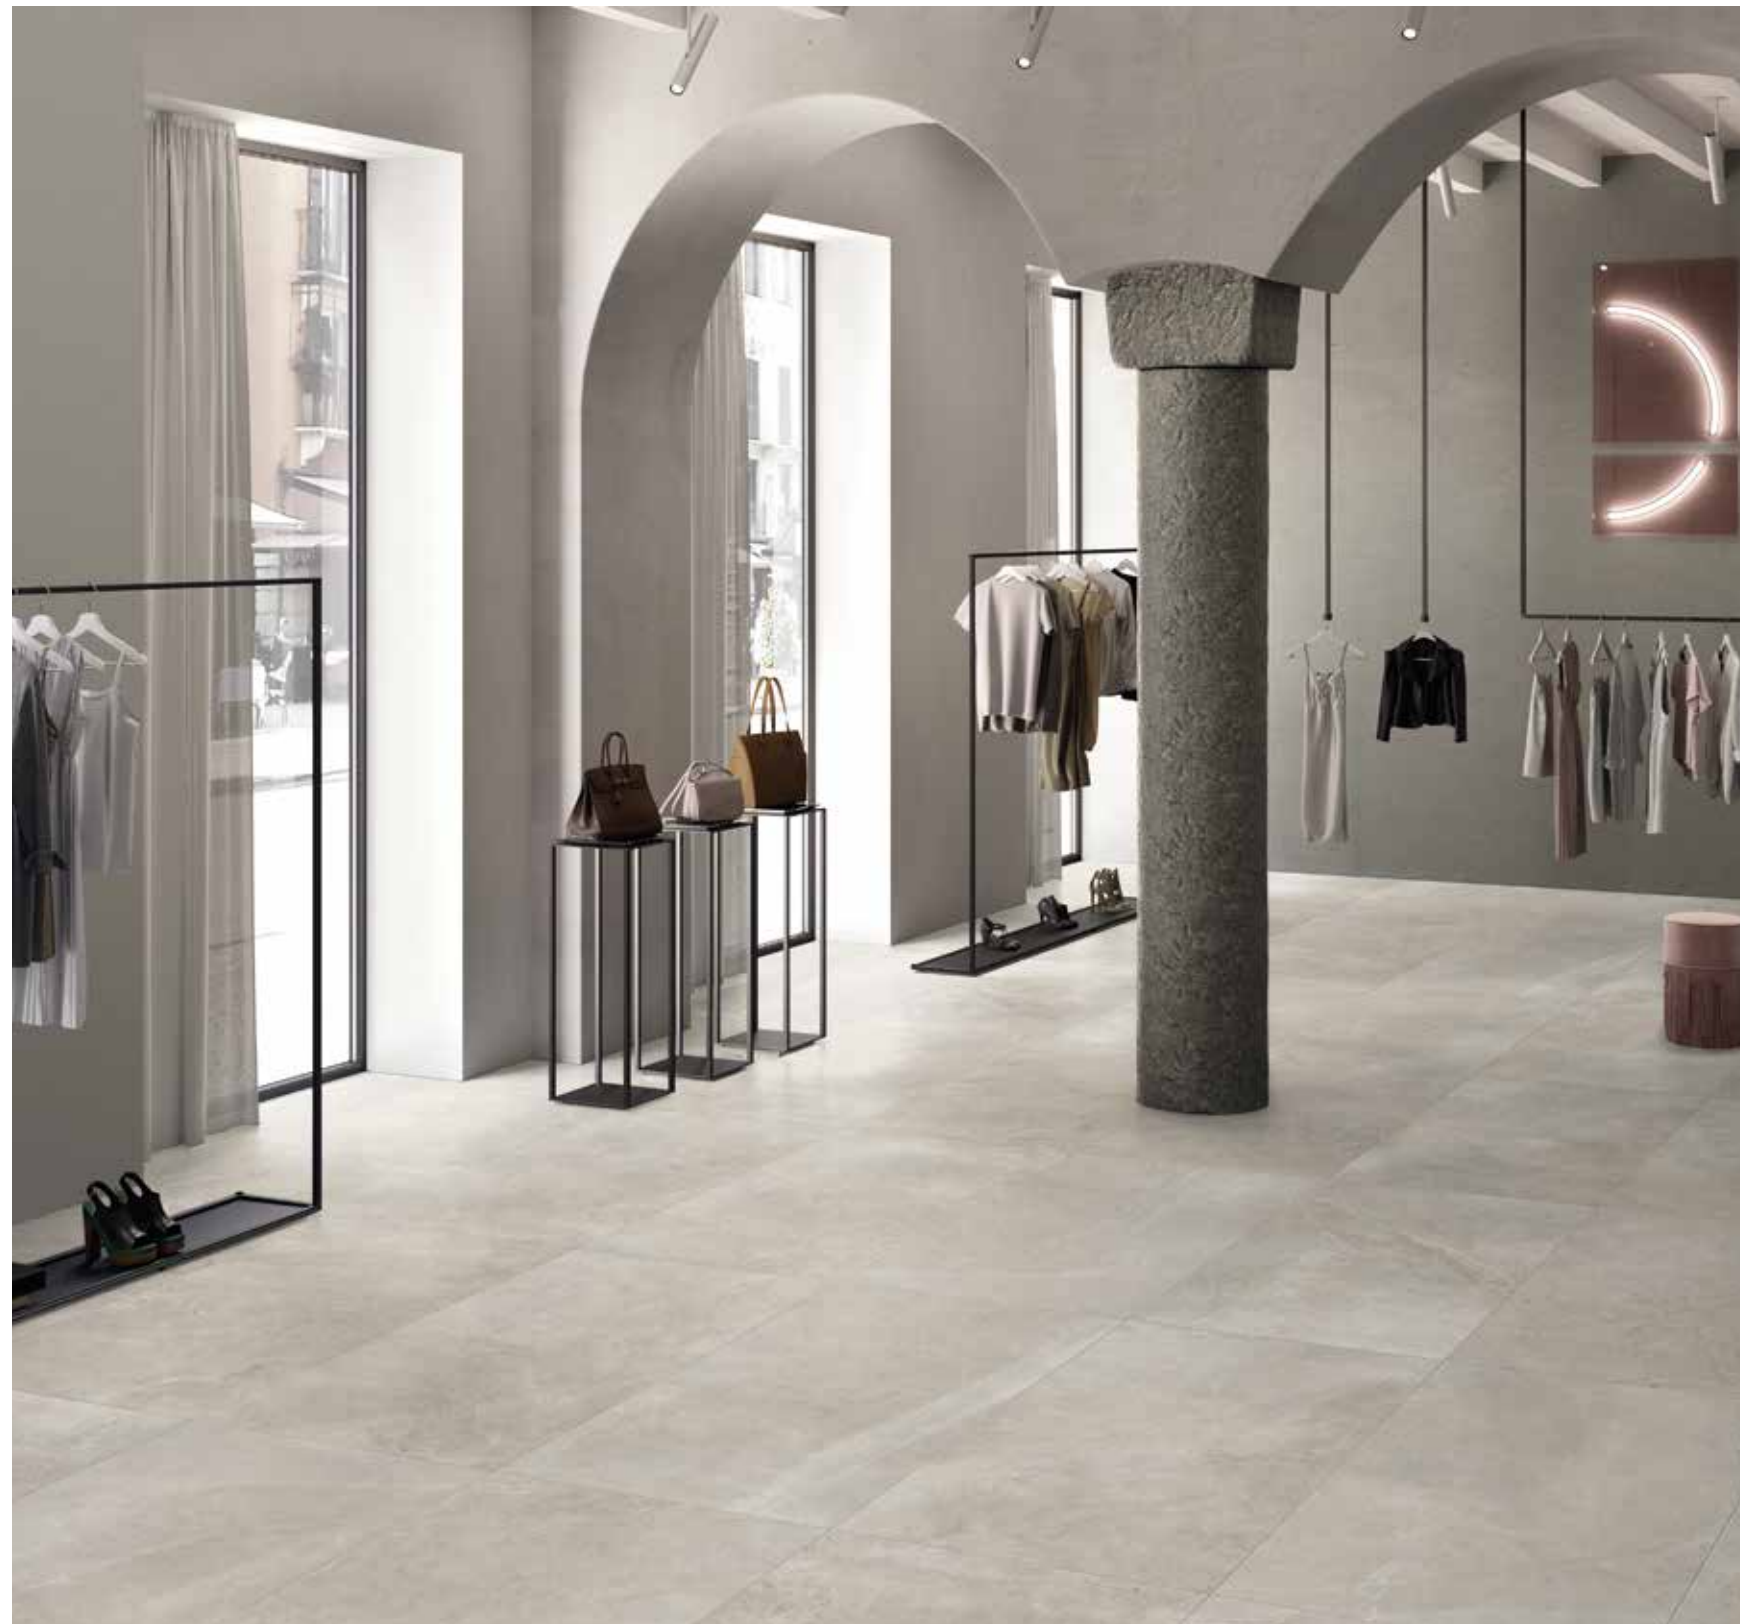

COAST **LIGHT**
60x60 RT . 24"x24"
30x60 RT . 12"x24"





COAST **ASH**
60x120 RT . 24"x48"

COAST **ASH**
60x120 RT . 24"x48"





COAST **SAND**
60x120 RT . 24"x48"



COAST **SAND**
60x120 RT . 24"x48"

COAST ROAD

Gres Porcellanato . *Porcelain stoneware*
EN 14411 Allegato G _ Piastrelle di ceramica pressate a secco
con basso assorbimento d'acqua (Ev ≤ 0,5%)
Reference standard: EN 14411 Appendix G _ Dry pressed ceramic tiles
with low water absorption (Ev ≤ 0,5%)

60x120 RT . 24"x48" **R10 B**

 Spessore . Thickness **8,5mm**

60x60 RT . 24"x24" - 30x60 RT . 12"x24" **R10 B**

 Spessore . Thickness **8mm**

COAST LIGHT



COAST **LIGHT**
60x120 RT . 24"x48"




COAST **LIGHT**
60x60 RT . 24"x24"



COAST **LIGHT**
30x60 RT . 12"x24"

Pezzi speciali . Special trims



COAST **LIGHT** Battiscopa
7,2x60 RT . 3"x24"

COAST ASH



COAST **ASH**
60x120 RT . 24"x48"




COAST **ASH**
60x60 RT . 24"x24"



COAST **ASH**
30x60 RT . 12"x24"

Pezzi speciali . Special trims



COAST **ASH** Battiscopa
7,2x60 RT . 3"x24"

COAST ROAD

Gres Porcellanato . *Porcelain stoneware*
EN 14411 Allegato G __ Piastrelle di ceramica pressate a secco
con basso assorbimento d'acqua (Ev ≤ 0,5%)
Reference standard: EN 14411 Appendix G __ Dry pressed ceramic tiles
with low water absorption (Ev ≤ 0,5%)

60x120 RT . 24"x48" *R10 B*

 Spessore . Thickness **8,5mm**

60x60 RT . 24"x24" - 30x60 RT . 12"x24" *R10 B*

 Spessore . Thickness **8mm**

COAST SAND



COAST **SAND**
60x120 RT . 24"x48"




COAST **SAND**
60x60 RT . 24"x24"



COAST **SAND**
30x60 RT . 12"x24"

Pezzi speciali . Special trims



COAST **SAND** Battiscopa
7,2x60 RT . 3"x24"

Imballi . *Packing*

	pz/box	mq/box	kg/box	box/plt	mq/plt	kg/plt	spessore
60x120 RT	2	1,44	29,00	35	50,40	1030	8,5 mm
60x60 RT	3	1,08	19,50	40	43,20	795	8 mm
30x60 RT	7	1,26	22,80	40	50,40	927	8 mm
battiscopa 7,2x60 RT	10	6 ml	8,00	70	420 ml	572	-

DIRECTION



DIRECTION **PEARL**
30x60 RT . 12"x24"



DIRECTION **GREY**
60x60 RT . 24"x24"



DIRECTION **SAND**
60x60 RT . 24"x24"

DIRECTION **DARK** 2CM
60x60 RT . 24"x24"



DIRECTION **DARK**
60x60 RT . 24"x24"



DIRECTION

Gres Porcellanato . *Porcelain stoneware*
EN 14411 Allegato G _ Piastrelle di ceramica pressate a secco con basso assorbimento d'acqua (Ev ≤ 0,5%)
Reference standard: EN 14411 Appendix G _ Dry pressed ceramic tiles with low water absorption (Ev ≤ 0,5%)

60x60 RT . 24"x24" *R11 C*

60x60 RT . 24"x24" - 30x60 RT . 12"x24" *R10 B*


 Spessore . Thickness **20mm**

 Spessore . Thickness **8mm**

DARK



DIRECTION **DARK**
60x60 RT . 24"x24"

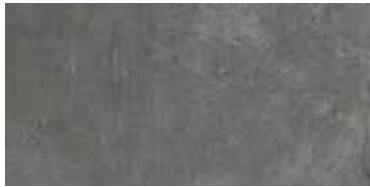


DIRECTION **DARK**
30x60 RT . 12"x24"



DIRECTION **DARK** 2CM
60x60 RT . 24"x24"

Pezzi speciali . Special trims



DIRECTION **DARK** Battiscopa
7,2x60 RT . 3"x24"

GREY



DIRECTION **GREY**
60x60 RT . 24"x24"




DIRECTION **GREY**
30x60 RT . 12"x24"



DIRECTION **GREY** 2CM
60x60 RT . 24"x24"

Pezzi speciali . Special trims



DIRECTION **GREY** Battiscopa
7,2x60 RT . 3"x24"

SAND



DIRECTION **SAND**
60x60 RT . 24"x24"

PEARL



DIRECTION **PEARL**
60x60 RT . 24"x24"



DIRECTION **SAND**
30x60 RT . 12"x24"




DIRECTION **SAND 2CM**
60x60 RT . 24"x24"




DIRECTION **PEARL**
30x60 RT . 12"x24"

Pezzi speciali . Special trims



DIRECTION **PEARL** Battiscopa
7,2x60 RT . 3"x24"

Pezzi speciali . Special trims



DIRECTION **SAND** Battiscopa
7,2x60 RT . 3"x24"

Imballi . Packing

	pz/box	mq/box	kg/box	box/plt	mq/plt	kg/plt	spessore
60x60 RT	3	1,08	19,50	40	43,20	795	8 mm
30x60 RT	7	1,26	22,80	40	50,40	927	8 mm
60x60 RT 2CM	2	0,72	32,00	30	21,60	972	20 mm
battiscopa 7,2x60 RT	10	6 ml	8,00	70	420 ml	572	-

GROUND

GROUND **GRAPHITE**
60x60 RT . 24"x24"

GROUND **GREY**
60x120 RT . 24"x48"





GROUND **LIGHT**
60x60 RT . 24"x24"

GROUND **IVORY**
60x120 RT . 24"x48"
GROUND **IVORY 2CM**
60x60 RT . 24"x24"





GROUND **GREY 2CM**
60x60 RT . 24"x24"



GROUND **GREY 2CM**
60x60 RT . 24"x24"

GROUND

Gres Porcellanato . *Porcelain stoneware*
EN 14411 Allegato G _ Piastrelle di ceramica pressate a secco con basso assorbimento d'acqua (Ev ≤ 0,5%)
Reference standard: EN 14411 Appendix G _ Dry pressed ceramic tiles with low water absorption (Ev ≤ 0,5%)

60x120 RT . 24"x48" **R10 B**  Spessore . Thickness **8,5mm**
60x60 RT . 24"x24" - 30x60 RT . 12"x24" **R10 B**  Spessore . Thickness **8mm**
GRIP **R11 C**  Spessore . Thickness **8mm / 8,5mm**
60x60 RT . 24"x24" **R11 C**  Spessore . Thickness **20mm**

GRAPHITE



GROUND **GRAPHITE**
60x120 RT . 24"x48"
60x120 GRIP . 24"x48"




GROUND **GRAPHITE**
60x60 RT . 24"x24"
60x60 GRIP . 24"x24"



GROUND **GRAPHITE**
30x60 RT . 12"x24"
30x60 GRIP . 12"x24"

Pezzi speciali . Special trims



GROUND **GRAPHITE** Battiscopa
7,2x60 RT . 3"x24"

GREY



GROUND **GREY**
60x120 RT . 24"x48"
60x120 GRIP . 24"x48"




GROUND **GREY**
60x60 RT . 24"x24"
60x60 GRIP . 24"x24"



GROUND **GREY 2CM**
60x60 RT . 24"x24"

Pezzi speciali . Special trims



GROUND **GREY** Battiscopa
7,2x60 RT . 3"x24"

GROUND

Gres Porcellanato . *Porcelain stoneware*
EN 14411 Allegato G _ Piastrelle di ceramica pressate a secco con basso assorbimento d'acqua (Ev ≤ 0,5%)
Reference standard: EN 14411 Appendix G _ Dry pressed ceramic tiles with low water absorption (Ev ≤ 0,5%)

LIGHT



GROUND **LIGHT**
60x120 RT . 24"x48"
60x120 GRIP . 24"x48"




GROUND **LIGHT**
60x60 RT . 24"x24"
60x60 GRIP . 24"x24"



GROUND **LIGHT**
30x60 RT . 12"x24"
30x60 GRIP . 12"x24"

Pezzi speciali . Special trims



GROUND **LIGHT** Battiscopa
7,2x60 RT . 3"x24"

60x120 RT . 24"x48" **R10 B**  Spessore . Thickness **8,5mm**
60x60 RT . 24"x24" - 30x60 RT . 12"x24" **R10 B**  Spessore . Thickness **8mm**
GRIP **R11 C**  Spessore . Thickness **8mm / 8,5mm**
60x60 RT . 24"x24" **R11 C**  Spessore . Thickness **20mm**


IVORY



GROUND **IVORY**
60x120 RT . 24"x48"
60x120 GRIP . 24"x48"



GROUND **IVORY**
60x60 RT . 24"x24"
60x60 GRIP . 24"x24"

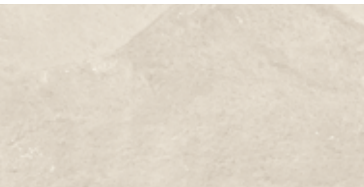


GROUND **IVORY**
30x60 RT . 12"x24"
30x60 GRIP . 12"x24"



GROUND **IVORY 2CM**
60x60 RT . 24"x24"

Pezzi speciali . Special trims



GROUND **IVORY** Battiscopa
7,2x60 RT . 3"x24"

Imballi . Packing							
	pz/box	mq/box	kg/box	box/plt	mq/plt	kg/plt	spessore
60x120 RT	2	1,44	29,00	35	50,40	1030	8,5 mm
60x60 RT	3	1,08	19,50	40	43,20	795	8 mm
30x60 RT	7	1,26	22,80	40	50,40	927	8 mm
battiscopa 7,2x60 RT	10	6 ml	8,00	70	420 ml	572	-
60x60 RT 2CM	2	0,72	32,00	30	21,60	972	20 mm

LAKE STONE



LAKE **IVORY**
60x60 RT . 24"x24"

LAKE **GREY**
45x90 RT . 18"x36"





LAKE **GREY 2CM**
60x60 RT . 24"x24"

LAKE **SAND**
60x60 RT . 24"x24"

LAKE **SAND GRIP**
60x60 RT . 24"x24"





LAKE **SAND**
60x60 RT . 24"x24"

LAKE **SAND GRIP**
60x60 RT . 24"x24"

LAKE **SAND 2CM**
45x90 RT . 18"x36"





LAKE IVORY GRIP
60x60 RT . 24"x24"

LAKE STONE

Gres Porcellanato . *Porcelain stoneware*
EN 14411 Allegato G _ Piastrelle di ceramica pressate a secco
con basso assorbimento d'acqua (Ev ≤ 0.5%)
Reference standard: EN 14411 Appendix G _ Dry pressed ceramic tiles
with low water absorption (Ev ≤ 0.5%)

45x90 RT . 18"x36" **R9 B**  Spessore . Thickness **9mm**
60x60 RT . 24"x24" - 30x60 RT . 12"x24" **R9 B**  Spessore . Thickness **8mm**
GRIP **R11 C**  Spessore . Thickness **8mm**
45x90 RT . 18"x36" - 60x60 RT . 24"x24" **R11 C**  Spessore . Thickness **20mm**


LAKE GREY




LAKE GREY
45x90 RT . 18"x36"



LAKE GREY 2CM
45x90 RT . 18"x36"

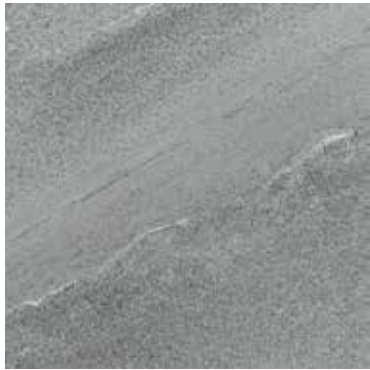

LAKE GREY
60x60 RT . 24"x24"
60x60 RT GRIP . 24"x24"

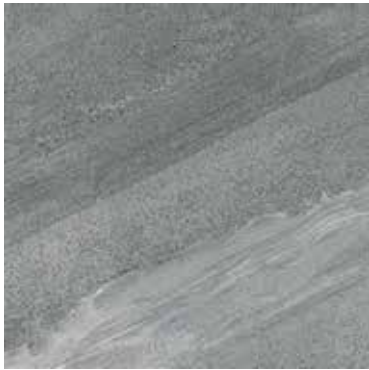


LAKE GREY 2CM
60x60 RT . 24"x24"



LAKE GREY
30x60 RT . 12"x24"
30x60 GRIP . 12"x24"

Pezzi speciali . Special trims



LAKE GREY Battiscopa TD
7,2x60 RT . 3"x24"

LAKE IVORY



LAKE IVORY
45x90 RT . 18"x36"




LAKE IVORY
60x60 RT . 24"x24"
60x60 GRIP . 24"x24"



LAKE IVORY
30x60 RT . 12"x24"
30x60 GRIP . 12"x24"

Pezzi speciali . Special trims



LAKE IVORY Battiscopa TD
7,2x60 RT . 3"x24"

LAKE STONE

45x90 RT . 18"x36" **R9 B**  Spessore . Thickness **9mm**
60x60 RT . 24"x24" - 30x60 RT . 12"x24" **R9 B**  Spessore . Thickness **8mm**
GRIP **R11 C**  Spessore . Thickness **8mm**
45x90 RT . 18"x36" - 60x60 RT . 24"x24" **R11 C**  Spessore . Thickness **20mm**

LAKE SAND



LAKE SAND
45x90 RT . 18"x36"



LAKE SAND 2CM
45x90 RT . 18"x36"



LAKE SAND
60x60 RT . 24"x24"
60x60 RT GRIP . 24"x24"




LAKE SAND 2CM
60x60 RT . 24"x24"



LAKE SAND
30x60 RT . 12"x24"
30x60 RT GRIP . 12"x24"

Pezzi speciali . Special trims



LAKE SAND Battiscopa TD
7,2x60 RT . 3"x24"

Imballi . Packing

	pz/box	mq/box	kg/box	box/plt	mq/plt	kg/plt	spessore
45x90 RT	3	1,215	25,00	36	43,74	912	9 mm
60x60 RT / GRIP	3	1,08	21,00	40	43,20	852	8 mm
30x60 RT / GRIP	7	1,26	24,50	40	50,40	992	8 mm
battiscopa 7,2x60 RT	10	6 ml	8,00	70	420 ml	572	-
45x90 RT 2 cm	2	0,81	35,00	27	21,87	957	20 mm
60x60 RT 2 cm	2	0,72	32,00	30	21,60	972	20 mm

ORIGINI



ORIGINI **PERLA**
60x60 RT . 24"x24"



ORIGINI **GRIGIO**
60x60 RT . 24"x24"


ORIGINI **SABBIA STRUTT.**
30x60 RT . 12"x24"





ORIGINI **ANTRACITE**
30x60 RT . 12"x24"

ANTRACITE

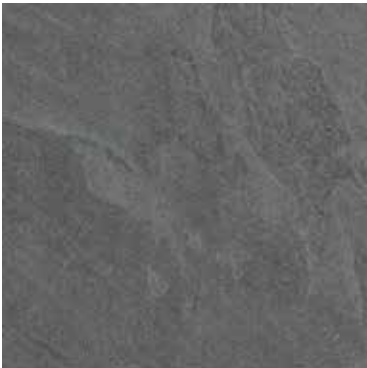

ORIGINI **ANTRACITE**
60x60 RT . 24"x24"




ORIGINI **ANTRACITE**
30x60 RT . 12"x24"



ORIGINI **ANTRACITE STRUTTURATO**
30x60 RT . 12"x24"

Pezzi speciali . Special trims



ORIGINI Battiscopa ANTRACITE
7,2x60 RT . 3"x24"

GRIGIO



ORIGINI **GRIGIO**
60x60 RT . 24"x24"




ORIGINI **GRIGIO**
30x60 RT . 12"x24"



ORIGINI **GRIGIO STRUTTURATO**
30x60 RT . 12"x24"

Pezzi speciali . Special trims



ORIGINI Battiscopa GRIGIO
7,2x60 RT . 3"x24"

PERLA



ORIGINI **PERLA**
60x60 RT . 24"x24"




ORIGINI **PERLA**
30x60 RT . 12"x24"



ORIGINI **PERLA STRUTTURATO**
30x60 RT . 12"x24"

Pezzi speciali . Special trims



ORIGINI Battiscopa PERLA
7,2x60 RT . 3"x24"

SABBIA



ORIGINI **SABBIA**
60x60 RT . 24"x24"




ORIGINI **SABBIA**
30x60 RT . 12"x24"



ORIGINI **SABBIA STRUTTURATO**
30x60 RT . 12"x24"

Pezzi speciali . Special trims



ORIGINI Battiscopa SABBIA
7,2x60 RT . 3"x24"

Imballi . *Packing*

	pz/box	mq/box	kg/box	box/plt	mq/plt	kg/plt	spessore
60x60 RT	3	1,08	19,50	40	43,20	795	8 mm
30x60 RT	7	1,26	22,80	40	50,40	927	8 mm
30x60 RT Strutt.	7	1,26	22,80	40	50,40	927	8 mm
battiscopa 7,2x60 RT	10	6 ml	8,00	70	420 ml	572	-

STONETRACK

STONE SILVER
30x60 RT . 12"x24"


STONE **SILVER**
30x60 RT . 12"x24"





STONE **IVORY**
30x60 RT . 12"x24"

STONE **GREY**
30x60 RT . 12"x24"

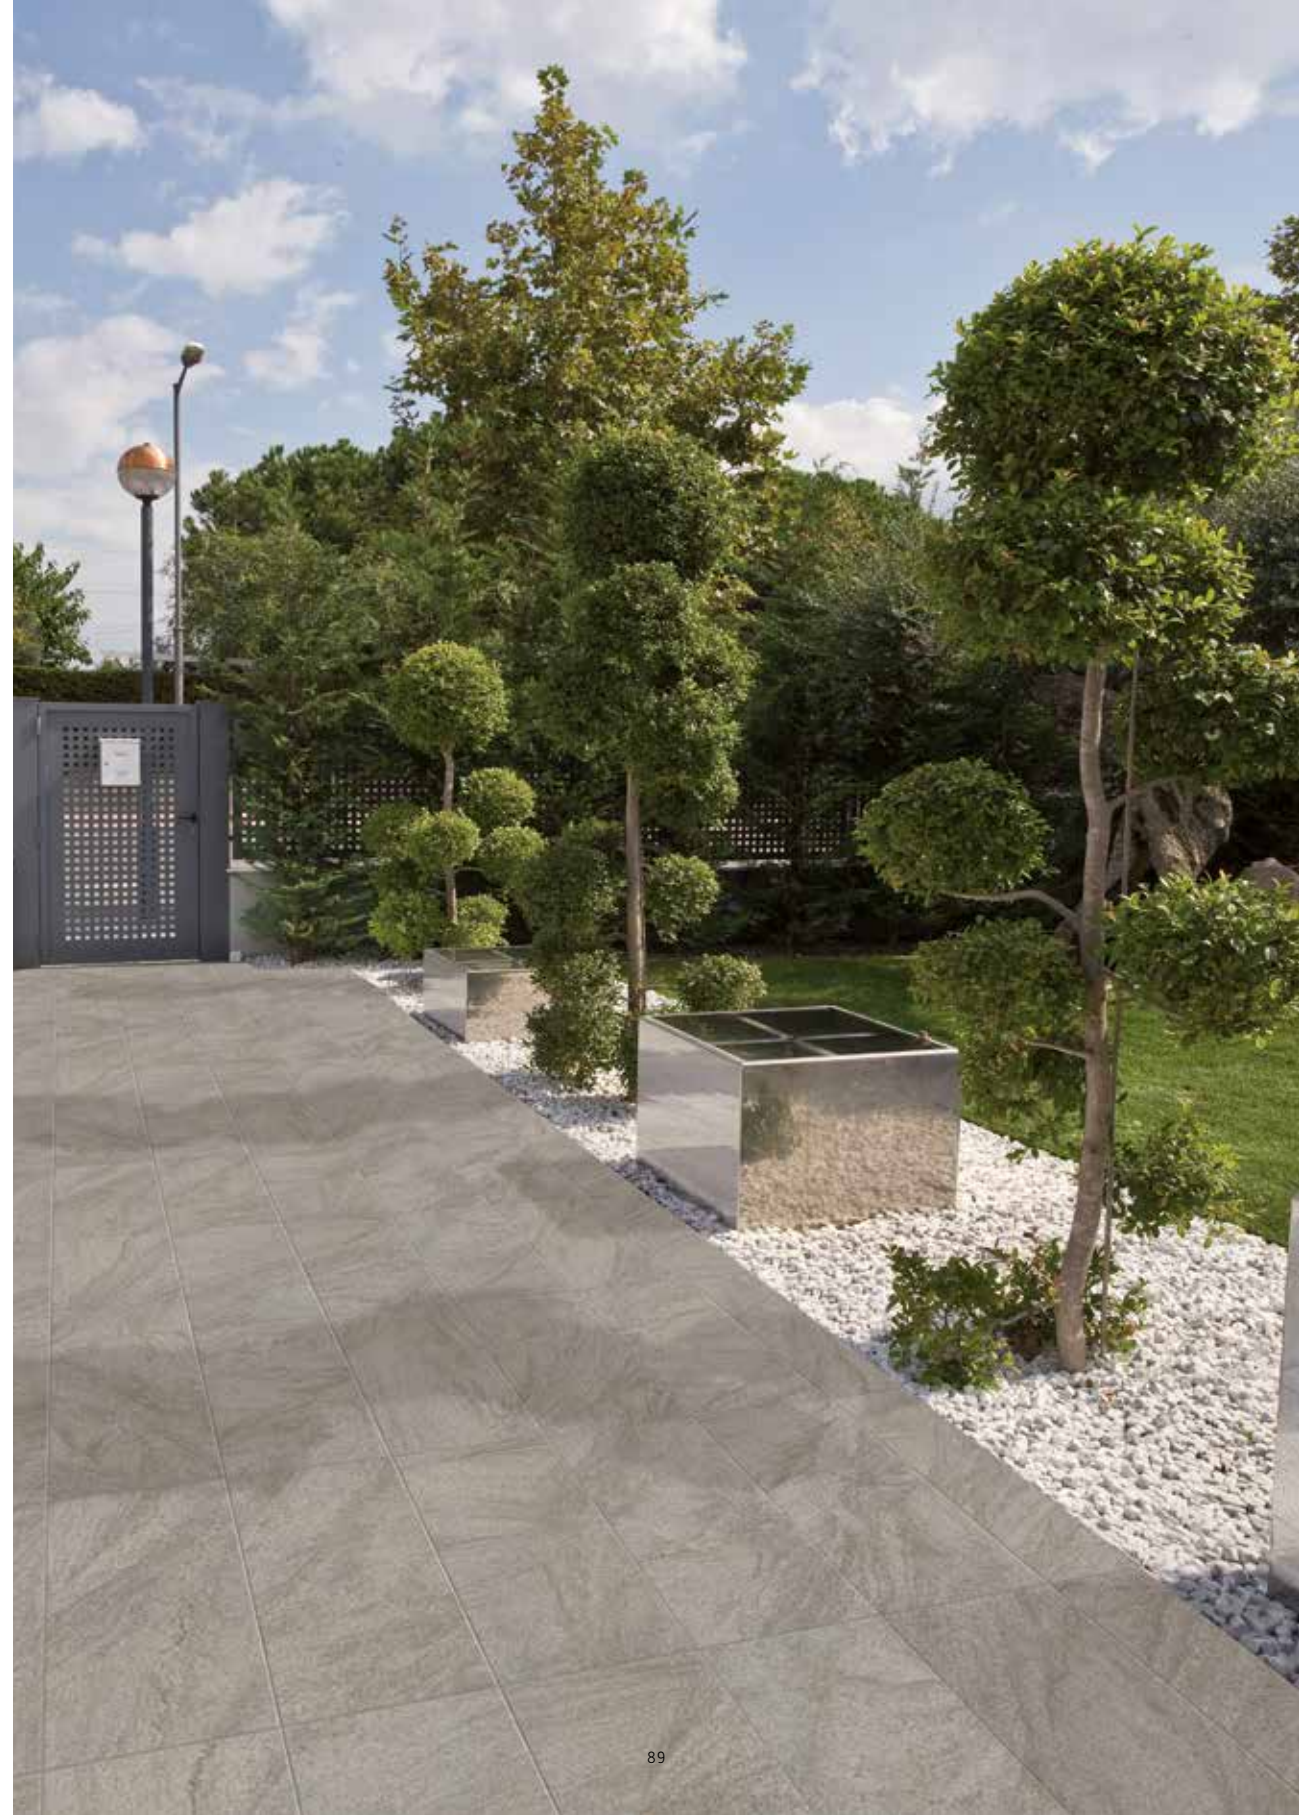



STONE **DARK**
30x60 RT . 12"x24"

STONE SILVER



STONE **SILVER**
30x60 RT . 12"x24"

STONE DARK



STONE **DARK**
30x60 RT . 12"x24"

STONE IVORY



STONE **IVORY**
30x60 RT . 12"x24"

STONE GREY



STONE **GREY**
30x60 RT . 12"x24"

Imballi . *Packing*

	pz/box	mq/box	kg/box	box/plt	mq/plt	kg/plt	spessore
30x60 RT	7	1,26	22,80	40	50,40	927	8 mm

Gruppo Bla

CARATTERISTICHE TECNICHE . <i>TECHNICAL CHARACTERISTICS</i> Caracteristiques techniques . Technische eigenschaften	NORMA . <i>NORMS</i> Normes . Normen	REQUISITI RICHIESTI . <i>REQUIREMENTS</i> Conditions requises . Geforderte eigenschaften			VALORE MEDIO * Valeur moyenne . Average rating Durchschnittswert	
		7 cm ≤ N <15 cm	N ≥ 15 cm		SUPERFICIE NATURALE	
Lunghezza e larghezza dei lati . <i>Length and width of the sides</i> Longuer et largeur de côtés . Länge und Breite	ISO 10545-2	RETTIFICATI	± 0,4 mm	± 0,3 %	± 1,0 mm	Conforme . According to Conforme . Gemäss
Rettilineità degli spigoli . <i>Straightness</i> Equerrage des angles . Kantengeradheit			± 0,4 mm	± 0,3 %	± 0,8 mm	Conforme . According to Conforme . Gemäss
Ortogonalità** . <i>Rectangularity**</i> Orthogonalité . Rechtwinkligkeit			± 0,4 mm	± 0,3 %	± 1,5 mm	Conforme . According to Conforme . Gemäss
Planarità . <i>Flatness</i> Planéité . Planität			± 0,6 mm	± 0,4 %	± 1,8 mm	Conforme . According to Conforme . Gemäss
Spessore . <i>Thickness</i> Épaisseur . Stärke	ISO 10545-2		± 0,5 mm	± 5 %	± 0,5 mm	Conforme . According to Conforme . Gemäss
Assorbimento % d'acqua . <i>Water absorption</i> Absorption d'eau . Wasseraufnahme	ISO 10545-3		Ev ≤ 0,5%			Conforme . According to Conforme . Gemäss
Determinazione della resistenza a flessione e della forza di rottura <i>Flexion and break resistance</i> Résistance à la flexion et à la force de ropture Biegefestigkeit und Bruchlast	ISO 10545-4		Spessore ≥ 7,5 mm $\left[\begin{array}{l} S \geq 1300 \\ R \geq 35 \text{ N/mm}^2 \end{array} \right.$			Conforme . According to Conforme . Gemäss
Determinazione della resistenza all'abrasione profonda (porcellanato non smaltato) <i>Deep Scratch Resistance (unglazed porcelain)</i> Résistance à l'abrasion profonde (gres cérame) Tiefenverschleissbeständigkeit (unglasierte Feinsteinzeug)	ISO 10545-6		≤ 175 mm ³			Conforme . According to Conforme . Gemäss
Coefficiente di espansione termica lineare tra 20° e 100° C <i>Linear thermal expansion 20°C to 100°C</i> Dilatation thermique linéaire entre 20°C et 100°C Lineare Waerme-ausdehnung zwischen 20°C und 100°C	ISO 10545-8		Metodo di prova disponibile . Test method available Méthode d'essai disponible . Prüfverfahren verfügbar			Conforme . According to Conforme . Gemäss
Resistenza agli sbalzi termici . <i>Thermal shock resistance</i> Résistance aux écarts de Température . Temperaturwechselbestaendigkeit	ISO 10545-9		Metodo di prova disponibile . Test method available Méthode d'essai disponible . Prüfverfahren verfügbar			Conforme . According to Conforme . Gemäss
Resistenza al gelo . <i>Frost resistance</i> Résistance au gel . Frostbeständigkeit	ISO 10545-12		Metodo di prova disponibile . Test method available Méthode d'essai disponible . Prüfverfahren verfügbar			Conforme . According to Conforme . Gemäss
Determinazione della resistenza chimica . <i>Chemical resistance</i> Résistance chimique . Chemikalienbeständigkeit	ISO 10545-13		Classe B minimo Class B min Clase B min Categorie B min			Conforme . According to Conforme . Gemäss
Reazione al fuoco . <i>Reaction to fire</i> Réaction au feu . Brendverhalten	-		Classe A1 o A1 fl - Class A1 o A1 fl Class A1 ou A1 fl - Klasse A1 oder A1 fl Clase A1 o A1 fl - Минимум A1 - A1 fl			Conforme . According to Conforme . Gemäss
Determinazione della resistenza alle macchie . <i>Resistance to staining</i> Résistance aux taches . Beständigkeit gegen Fleckenbil	ISO 10545-14		Classe 3 minimo . Class 3 min Categorie 3 min . Klasse 3 min			Conforme . According to Conforme . Gemäss
Resistenza allo scivolamento . <i>Slip resistance</i> Résistance au glissement . Bestimmung der Rutschemmungsfähigkeit	DIN EN 16165 (Previously DIN 51130)		Classificazione R . Classification R Classification R . Klassifizierung R			Vedere dettaglio . See chart Voir liste . Siehe tab.
Resistenza allo scivolamento . <i>Slip resistance</i> Résistance au glissement . Bestimmung der Rutschemmungsfähigkeit	DIN EN 16165 (Previously DIN 51097)		Classificazione A B C . Classification A B C Classification A B C . Klassifizierung A B C			Vedere dettaglio . See chart Voir liste . Siehe tab.
Resistenza allo scivolamento - coefficiente di attrito dinamico (DCOF) <i>Slip resistance - dynamic friction coefficient</i> Résistance au glissement - resistance de frottement dynamique Bestimmung der Rutschemmungsfähigkeit - dynamischer reibungskoeffizient	ANSI A 326.3		≥ 0,42			Vedere dettaglio . See chart Voir liste . Siehe tab.
GRADO DI VARIAZIONE CROMATICA Ogni prodotto si caratterizza per un grado di stonalizzazione variabile da prodotto a prodotto, da colore a colore. Per stonalizzazione s'intende variazione di gradazione cromatica da piastrella a piastrella. COLOUR SHADE VARIATION Every product is characterised by colour-shading that can vary from one product to another and from one colour to another. When referring to colour-shading we refer to the chromatic variation of the tile surface.		COAST ROAD V2 DIRECTION V2 GROUND V2 LAKE STONE V3 ORIGINI V2 STONETRACK V2				



Casella Postale 52
Ufficio postale di Sassuolo
Piazza San Paolo, 1
41049 Sassuolo (MO)